

## Wi-Fi Network applications for Apple Mac OS X

By Pranay Pancholi, Loughborough University 26/3/2014

Whilst there is a large choice of Wi-Fi analytical tools available for the PC market, the choice available to MAC OS X users is somewhat limited.

This document provides an overview of 8 applications – some are free and others have a cost - that can be used to assist with Wi-Fi stumbling and surveying on Mac OS X. They can help in various ways to troubleshoot and diagnose wireless connectivity issues in the field:

- Mac OS X Wi-Fi Scanner
- iStumbler
- Chanalyzer for Mac
- NetSpot
- zPerf
- WiSpy
- WiFi Signal
- WiFi Explorer


### Mac OS X Wi-Fi Scanner

*System Requirements: OS X 10.7 or later*

*Price: Free*

If you have OS X 10.7 or above there is now a useful built-in Wi-Fi scanner utility, which is used to discover nearby available wireless networks.

1. Select option button followed by pressing on **Airport** icon on the menu bar. From the drop down list select **Open Wireless Diagnostics**.

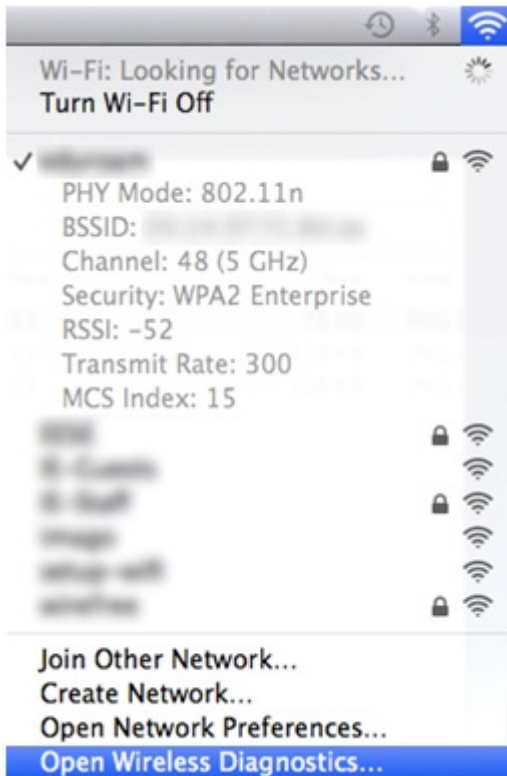


2. When prompted, enter your administrator **name** and **password**.



3. The Wireless Diagnostics window will appear, asking you to follow on screen instructions.




4. From the menu bar select **Window** followed by **Utilities** to open the Mac Wi-Fi Scanner application. Alternatively you can also press CMD+2 to open the application.

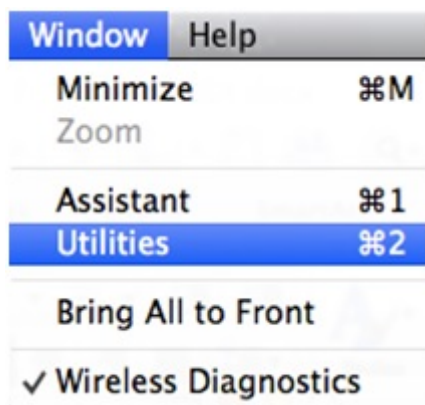

The Utilities window opens and presents you with five options:


**Info** – Displays all network information about the AP to which your device is currently associated.

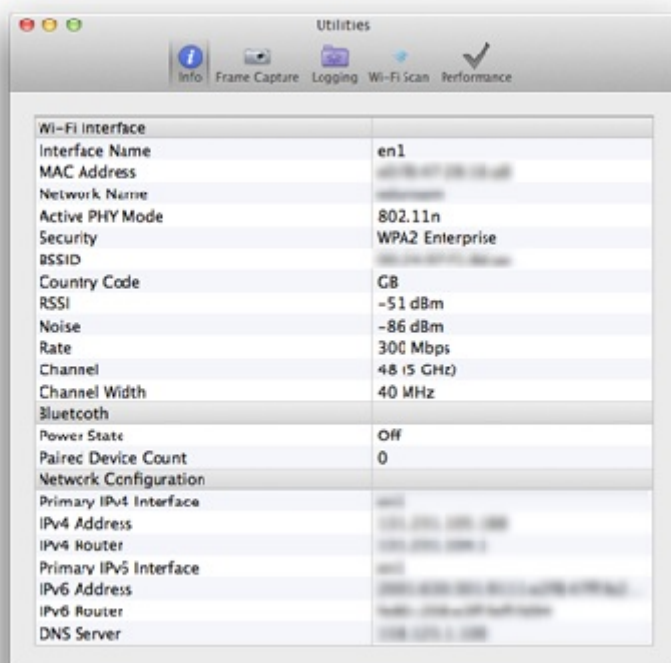

**Frame Capture** - Allows capturing of data sent or received over the wireless network.



**Logging** – Allows you to capture logs for debugging events occurring on the associated wireless network.

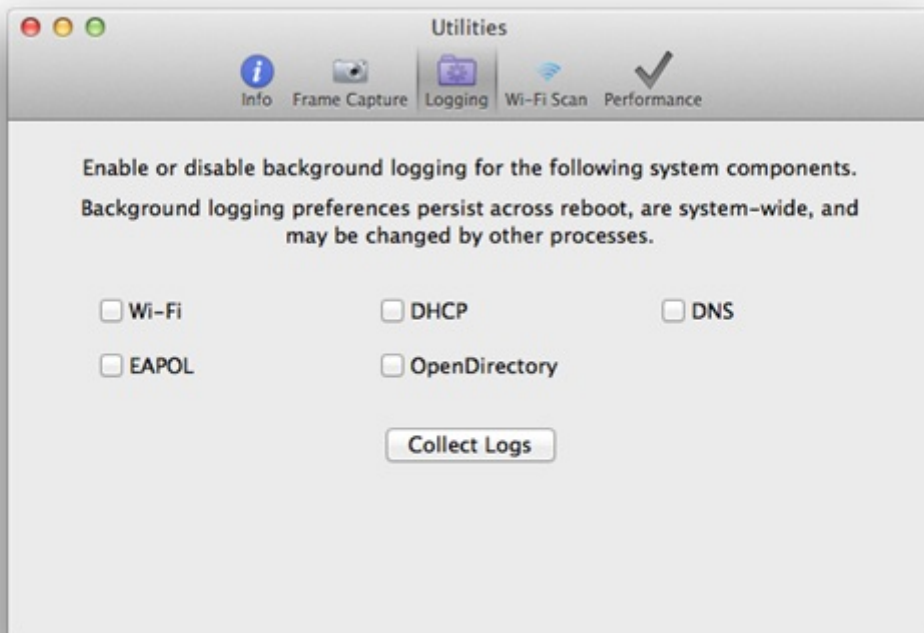


**Wi-Fi Scan** – Scans all available wireless networks within the spectrum of your area and gives recommendations for best 2.4 and 5 GHz channels available that are free to use.

Network	BSSID	Security	Protocol	RSSI	No.	Ch.	Band	Width	C.
Network 1	00:11:22:33:44:55	WPA2 Enterprise	802.11a/n	-45	-92	48	5 GHz	40 MHz	GB
Network 2	00:11:22:33:44:56	WPA2 Enterprise	802.11a/n	-42	-92	40	5 GHz	40 MHz	GB
Network 3	00:11:22:33:44:57	WPA2 Enterprise	802.11a/n	-83	-92	44	5 GHz	40 MHz	GB
Network 4	00:11:22:33:44:58	WPA2 Enterprise	802.11a/n	-61	-92	136	5 GHz	40 MHz	GB
Network 5	00:11:22:33:44:59	WPA2 Enterprise	802.11b/g/n	-41	-92	6	2.4GHz	20 MHz	GB
Network 6	00:11:22:33:44:60	WPA2 Enterprise	802.11b/g/n	-74	-92	6	2.4GHz	20 MHz	GB
Network 7	00:11:22:33:44:61	WPA2 Enterprise	802.11b/g/n	-58	-92	11	2.4GHz	20 MHz	GB
Network 8	00:11:22:33:44:62	WPA2 Enterprise	802.11g	-82	-92	1	2.4GHz	20 MHz	GB
Network 9	00:11:22:33:44:63	WPA2 Personal	802.11a/n	-43	-92	40	5 GHz	40 MHz	GB
Network 10	00:11:22:33:44:64	Open	802.11a	-76	-92	40	5 GHz	20 MHz	GB
Network 11	00:11:22:33:44:65	Open	802.11b/g	-63	-92	11	2.4GHz	20 MHz	GB
Network 12	00:11:22:33:44:66	WPA2 Enterprise	802.11a	-75	-92	40	5 GHz	20 MHz	GB
Network 13	00:11:22:33:44:67	WPA2 Enterprise	802.11b/g	-62	-92	11	2.4GHz	20 MHz	GB
Network 14	00:11:22:33:44:68	Open	802.11a/n	-45	-92	48	5 GHz	40 MHz	GB

2.4 GHz Networks: 16      Best 2.4 GHz Channels: 2, 3  
 5 GHz Networks: 17      Best 5 GHz Channels: 44

Found 33 networks      Scan Now

**Performance** – Provides real time graph of signal strength (dBm) and signal to noise ratio (SNR).

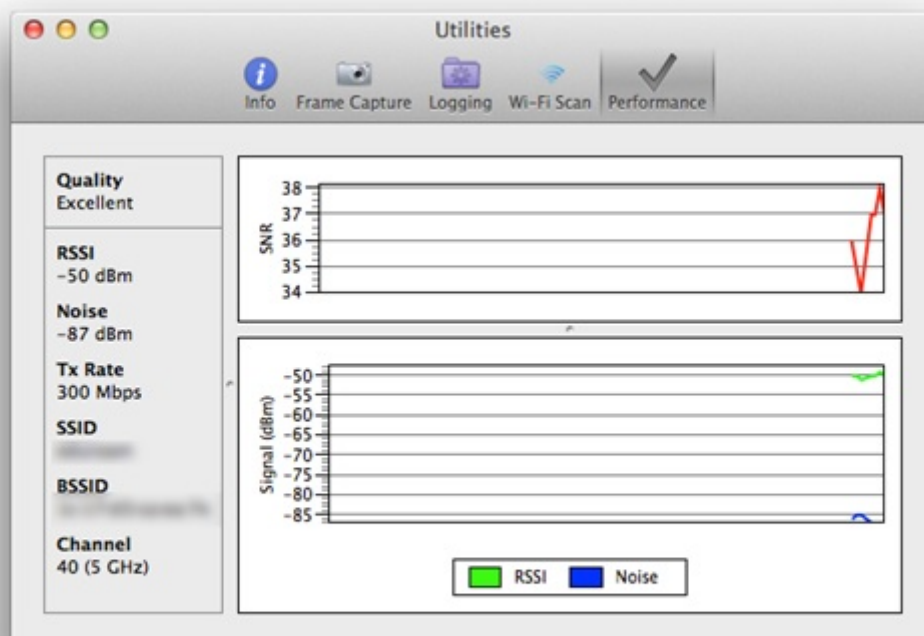


Note: If using OS X Lion 10.7 Wi-Fi Diagnostics can be located at /System/Library/CoreServices/

**iStumbler**

System Requirements: Intel, 64-bit processor, OS X 10.8 or later, Airport  
Price: Free

iStumbler for OS X is a wireless network discovery tool that scans for available wireless networks, bluetooth devices and bonjour services available to your Mac.

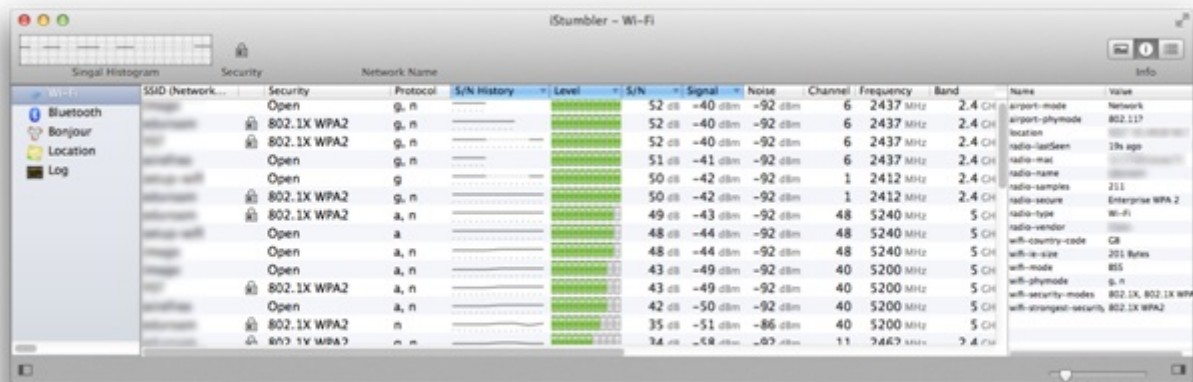

Upon starting the application the interface is very simple to follow. The information available gives details of:

- SSID – Wireless network name
- Security – Type of security used on available wireless network: WEP, WPA, WPA2.
- Protocol - A/B/G/N/AC
- Signal to Noise History – History of SNR since launch of application
- Level – Signal strength displayed in bars
- Signal to Noise ratio – SNR displayed in DB (Higher numbers being better)
- Signal – Signal strength displayed as DBm (Lower numbers the better)
- Noise – Noise level displayed as DBm
- Channel – Wireless channel of AP
- Frequency – Channel base frequency that AP operates in
- Band – Displays whether AP is operating in 2.4GHz or 5GHz band
- Width – Width AP is operating in 20MHz or 40 MHz
- Vendor – Manufacturer of AP
- BSSID – Mac address of the wireless access point
- Country Code – Country code of AP e.g. GB, US etc
- Location – Co-ordinates of AP
- Last Seen – When the network was last detected since start of scanning

The new release build 100 of iStumbler now brings in an information pane on the right hand side of the application, displaying additional information about a selected SSID as well as showing previous results from the scanning timeframe slider.



Info		Info							
Name	Value	#	Level	Signal	Noise	S/N	Freq	Width	Date
airport-mode	Network	280		-41...	-92 dBm	51 dBm	2462 h 20 MHz		just now
airport-phymode	802.11?	279		-41...	-92 dBm	51 dBm	2462 h 20 MHz		just now
location		278		-41...	-92 dBm	51 dBm	2462 h 20 MHz		12s ago
radio-lastSeen	just now	277		-41...	-92 dBm	51 dBm	2462 h 20 MHz		15s ago
radio-mac		276		-41...	-92 dBm	51 dBm	2462 h 20 MHz		29s ago
radio-name	YST	275		-41...	-92 dBm	51 dBm	2462 h 20 MHz		30s ago
radio-samples	312	274		-41...	-92 dBm	51 dBm	2462 h 20 MHz		42s ago
radio-secure	Enterprise WPA 2	273		-41...	-92 dBm	51 dBm	2462 h 20 MHz		45s ago
radio-type	Wi-Fi	272		-41...	-92 dBm	51 dBm	2462 h 20 MHz		1m 0s ago
radio-vendor	Cisco	271		-41...	-92 dBm	51 dBm	2462 h 20 MHz		1m 0s ago
wifi-country-code	GB	270		-41...	-92 dBm	51 dBm	2462 h 20 MHz		1m 12s ago
wifi-ie-size	187 Bytes	269		-41...	-92 dBm	51 dBm	2462 h 20 MHz		1m 30s ago
wifi-mode	BSS	268		-41...	-92 dBm	51 dBm	2462 h 20 MHz		1m 30s ago
wifi-phymode	g, n	267		-41...	-92 dBm	51 dBm	2462 h 20 MHz		1m 45s ago
wifi-security-modes	802.1X, 802.1X WPA2	266		-41...	-92 dBm	51 dBm	2462 h 20 MHz		1m 45s ago
wifi-strongest-security	802.1X WPA2	265		-41...	-92 dBm	51 dBm	2462 h 20 MHz		1m 57s ago
		264		-41...	-92 dBm	51 dBm	2462 h 20 MHz		2m 0s ago
		263		-41...	-92 dBm	51 dBm	2462 h 20 MHz		2m 15s ago

iStumber for Mac can be downloaded from: <http://www.istumbler.net/>

## Chanalyzer for Mac

*System Requirements: OS X 10.5 or later and Wi-Spy DBx*

*Price: £350.00*


Chanalyzer for Mac is a native application supported on OS X which provides colourful views of the RF spectrum to provide basic spectrum analysis functionality.

The software can be downloaded free from: <http://www.metageek.net/products/chanalyzer-mac/> [1]

The Mac OS X version of Chanalyzer allows users to:

- View Wi-Fi network table
- Monitor and locate sources of real time interference from Wi-Fi and non Wi-Fi RF activity
- Scan 2.4GHz and 5GHz
- Waterfall view
- Real time 3D Spectrogram view of data
- Save recordings of Wi-Fi Spectrum data

To view the RF spectrum within the application the Wi-Spy DBx USB module must be purchased and inserted to your Apple Mac desktop or laptop. Without the Wi-Spy DBx USB module the Spectrum features will not operate.

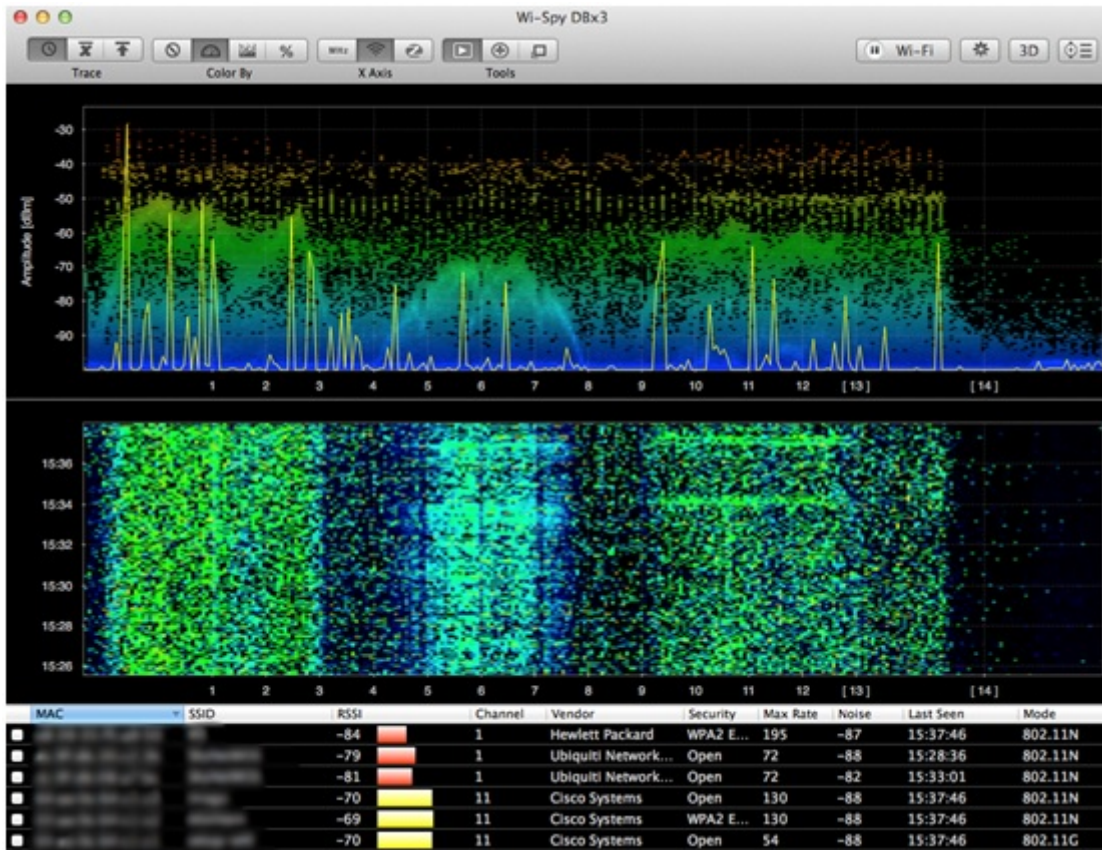

## NetSpot

*System Requirements: OS X 10.6 or later*

*Price: Free for home users, \$149 for Pro, \$500 for Enterprise.*

NetSpot is an application for Mac OS X that is used for wireless analysis, troubleshooting and wireless site survey. NetSpot comes in three versions: free, pro and enterprise. NetSpot is predominantly another wireless discovery scanner like iStumbler. However NetSpot also brings capability of doing wireless site surveys natively on Mac OS X. Although not as advanced and more established such as AirMagnet Survey Pro and Ekahau Site survey applications, which are Windows, only based applications. NetSpot does however produce simple passive and active wireless surveys with ease for OS X users.

- To use NetSpot as a wireless discovery tool to obtain a scan for nearby networks, first launch **NetSpot** and click on **Discover** on the top left of the window.



NetSpot - Discover and analyze wireless networks around you


DISCOVER | SURVEY | EXPORT | USER GUIDE | ASK A QUESTION | UPGRADE TO PRO

SSID	BSSID	Ch	Band	Security	Vendor	Mode	Level (SNR)	Signal	Signal % Avg	Max	Min	Noise	Noi...	Last seen
WPA2-Enterprise	...	11	2.4GHz	WPA2 Enterprise	ProCurve	b/g	-61	39%	-60	-57	-62	-92	8%	now
5GHz	...	40	5GHz	Open	ProCurve	a	-73	27%	-74	-73	-75	-92	8%	now
5GHz	...	4...	5GHz	Open	CISCO	a/n	-45	55%	-45	-45	-45	-92	8%	now
2.4GHz	...	1	2.4GHz	Open	CISCO	g	-81	19%	-82	-81	-82	-92	8%	now
5GHz	...	4	5GHz	WPA2 Enterprise	CISCO	a/n	-47	53%	-48	-47	-48	-85	15%	now
5GHz	...	48	5GHz	Open	CISCO	a	-46	54%	-47	-46	-48	-92	8%	now
5GHz	...	4	5GHz	Open	CISCO	a/n	-45	55%	-45	-45	-45	-92	8%	now
2.4GHz	...	11	2.4GHz	Open	ProCurve	b/g	-61	39%	-62	-61	-64	-92	8%	now
5GHz	...	4	5GHz	WPA2 Enterprise	CISCO	a/n	-45	55%	-46	-45	-46	-92	8%	now
5GHz	...	44	5GHz	Open	CISCO	a	-83	17%	-84	-83	-85	-92	8%	now
5GHz	...	4	5GHz	WPA2 Enterprise	CISCO	a/n	-45	55%	-46	-45	-46	-92	8%	now
2.4GHz	...	6	2.4GHz	WPA2 Enterprise	CISCO	g/n	-70	30%	-71	-70	-71	-92	8%	now
2.4GHz	...	1	2.4GHz	Open	CISCO	g	-81	19%	-81	-79	-82	-92	8%	now
2.4GHz	...	1	2.4GHz	WPA2 Enterprise	CISCO	g	-81	19%	-82	-81	-82	-92	8%	now
2.4GHz	...	1	2.4GHz	Open	CISCO	g/n	-82	18%	-82	-82	-82	-92	8%	now
2.4GHz	...	1	2.4GHz	WPA2 Enterprise	CISCO	g/n	-86	14%	-86	-86	-86	-92	8%	now
5GHz	...	40	5GHz	WPA2 Enterprise	ProCurve	a	-74	26%	-75	-74	-75	-92	8%	now
2.4GHz	...	6	2.4GHz	WPA2 Enterprise	CISCO	g/n	-43	57%	-43	-43	-43	-92	8%	now
5GHz	...	4	5GHz	Open	CISCO	a/n	-46	54%	-47	-46	-48	-92	8%	now
5GHz	...	1	5GHz	WPA2 Enterprise	CISCO	a/n	-61	39%	-62	-61	-63	-92	8%	now
5GHz	...	1	5GHz	Open	CISCO	a/n	-61	39%	-62	-61	-63	-92	8%	now
136	...	136	5GHz	Open	CISCO	a	-62	38%	-62	-61	-63	-92	8%	now
2.4GHz	...	6	2.4GHz	Open	CISCO	g/n	-71	29%	-71	-71	-71	-92	8%	now
2.4GHz	...	6	2.4GHz	WPA2 Enterprise	CISCO	g/n	-86	14%	-87	-86	-87	-92	8%	now

PAUSE | DETAILS | Scan interval: 5 sec | Filter networks | 25 of 25 shown


- Shortly after you will see all wireless SSIDs available.
- By default the application is set to scan for every 5 seconds. You can change the scan interval from 5 seconds, 10 seconds, 30 seconds to 1 minute from the **scan interval** drop down list.
- There is a **filter networks** option available on bottom right of the application.

Other additional options are available by pressing **Discover** from the menu bar.

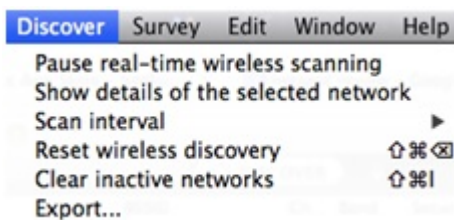


NetSpot can also be used for carrying out wireless site surveys.



To undertake a wireless site survey, first start NetSpot and click on the **Survey** button on the top left of the application. Click on **Start a new survey** to create a new survey or **Open a saved project** to continue to work on a previous survey. In this example **Start a new survey** is selected.

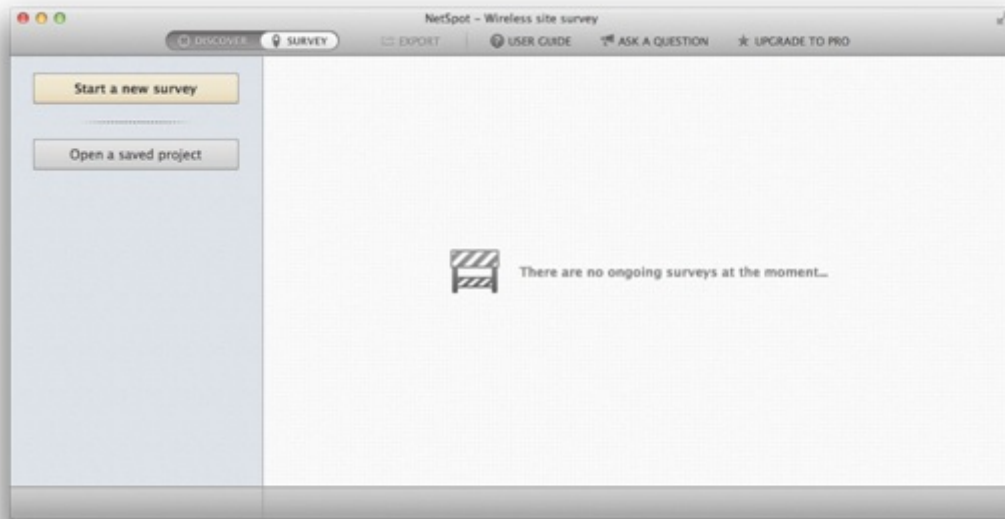


Next you have options to give your project a name, zone name and zone area type. Select option to load your map from file and press **continue**. If you do not have a floor plan available you also have the option to draw a sketch by selecting **Draw it**.

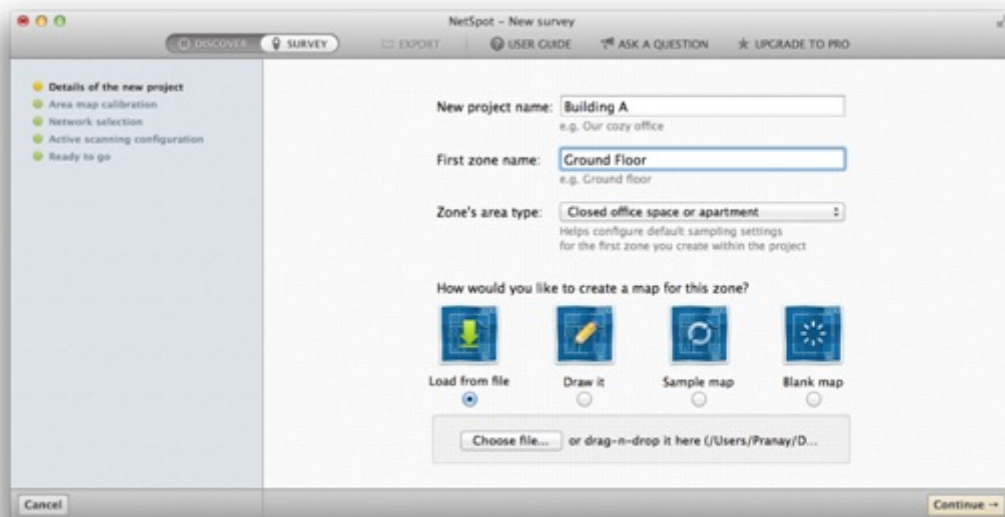


The floor plan is now loaded onto the screen you require to scale the floor plan. Click on two points on the map and enter the actual distance in a choice of meters or feet. Actual distance can be measured by using a laser pointed measuring tool.



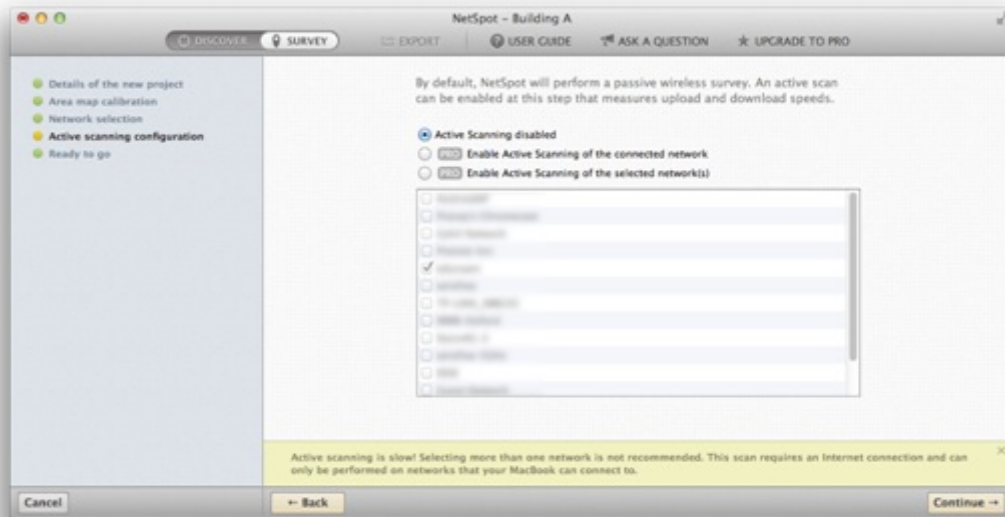

Now you are ready to perform your walkthrough. Walk to starting point of where you want to start survey and point on the map to your corresponding standing spot. NetSpot will take measurements, which takes approximately 5 seconds. Ensure you do not move from the spot whilst the measurement is taking place. Once the first measurement is taken, continue to take measurements on the whole area you wish to survey.

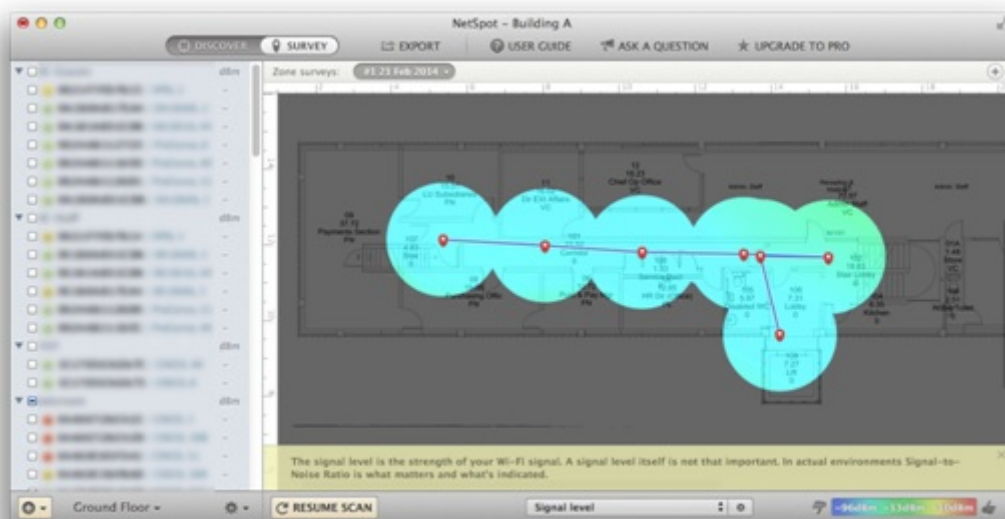

- Once complete you can press **stop scan** on the bottom left of the window which then you can then visualize from the produced heat map. From the drop down list on bottom middle of the screen you can change the heat map view to show: signal to noise ratio, signal level, noise level, quantity of APs, signal to interference ratio, frequency band coverage, etc.


## zPerf

*System Requirements: OS X 10.6 or later*

*Price: Free*

zPerf is a bandwidth measuring performance application for Mac OS X. The application can act as a client or as a server. zPerf allows for OS X to OS X throughput testing through wired and wireless connections.


To start throughput using zPerf, start the application on the machine that will act as the server, followed by clicking on the **Server** button. Keep note of Server IP Address as this will be used to connect to and from the Client machine. Press **Run Server** to start the zPerf server.

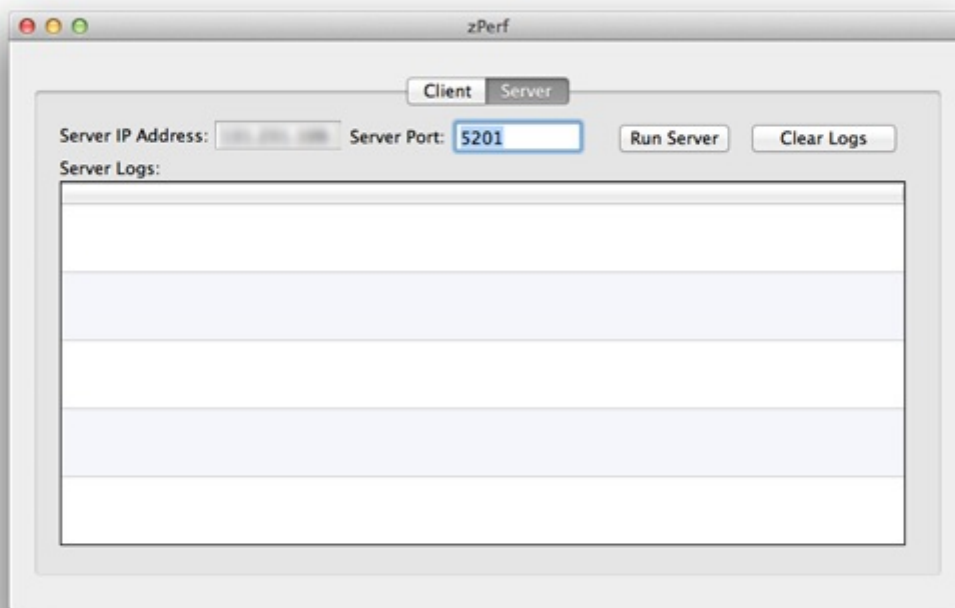

On the client machine start zPerf and click on **Client**. Enter the **Server Address** and **Server Port** that has been set in screenshot above. Set your **Test Duration** and **Transfer Direction** as **Client To Server**. Click on **Run Client** to start the test.





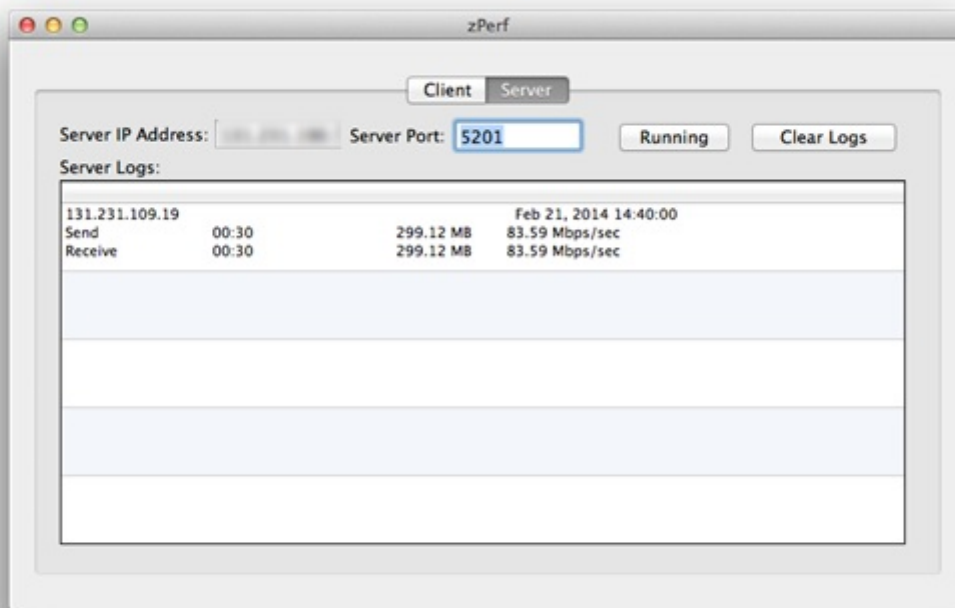

---


## WiSpy

*System Requirements: OS X 10.6 or later*

*Price: Free*

Available from: <http://www.mkdsoftware.com/software/> [2]

WiSpy is a tiny application that sits on your menu bar that simply displays what SSID you are connected to and your current transmit rate. This is useful to determine what link speed connection you are achieving from where you are located.

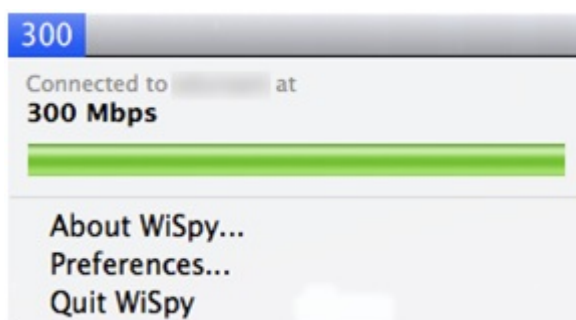

## WiFi Signal

*System Requirements: OS X 10.7 or later*

*Price: £0.69*

Available from the Apple App Store: <https://itunes.apple.com/gb/app/wifi-signal/id525912054?mt=12> [3]

WiFi Signal is another tiny application that again sits on your menu bar similar to WiSpy, which displays your transmit rate, along with more additional information of channel, signal, noise, SNR and a real time live signal strength/noise level graph. The application can also recommend alternative channels for your network to avoid signal overlap and channel conflicts.



---

## WiFi Explorer

*System Requirements: OS X 10.6 or later*

*Price: £1.99*

Available from the Apple App Store: <https://itunes.apple.com/gb/app/wifi-explorer/id494803304?mt=12> [4]

WiFi Explorer for Mac OS X is another wireless network scanner tool that lets you quickly identify available wireless networks, signal overlapping and conflict of channels on 2.4 GHz and 5 GHz frequency bands. Features include detecting channel, band type, maximum data rate, type of security and device manufacturer that are presented within a clear easy to use user interface.

WiFi Explorer also shows additional network details, such as visualisations of signal strength and WiFi environment of the 2.4 GHz and 5 GHz frequency bands.

The network details tab provides information from a selected network from the networks list table, providing details of the connected AP as shown in screenshot below.



The signal strength tab displays a visualisation of all available networks' signal strengths.



## 2.4 GHz:



## 5 GHz:



**Source URL:** <https://community.jisc.ac.uk/library/advisory-services/wi-fi-network-applications-apple-mac-os-x>

### Links

- [1] <http://www.metageek.net/products/chanalyzer-mac/>
- [2] <http://www.mkdsoftware.com/software/>
- [3] <https://itunes.apple.com/gb/app/wifi-signal/id525912054?mt=12>
- [4] <https://itunes.apple.com/gb/app/wifi-explorer/id494803304?mt=12>